

ELETTRODRAGO CLASSIC




CLASSIC



CLASSIC FIT

- Totally independent decks preassembled
- Armored st/st electric elements
- N°. 1 new spheres steam generator for each deck with electrovalve
- New hood with 1 speeds exhaust fan with removable grid
- N°. 1 digital keyboard DIGIT 01/E with special functions for controlling and energy saving (DIGIT99 program automatic valve for Series FIT)
- Power distributor included
- Power optimizer included
- Daily / weekly automatic start included
- Automatic adjustment of mouth temperature through a dedicated probe
- Baking plates in armored concrete
- Main electric board and electrovalves group located in the base or on top (to be decided during the assembling of the oven)
- Doors with low emission dismountable glass
- Doors with 3 positions lever (open, close, intermediate); control on the left for CLASSIC, control on the right for FIT
- Base with carters, on feet
- Preassembled elements for fast installation
- Front bench (Optional)

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø ½" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Steam chimney with hood with fan</i>	Ø 150
<i>Steam chimney with condensing unit (optional)</i>	Ø 200

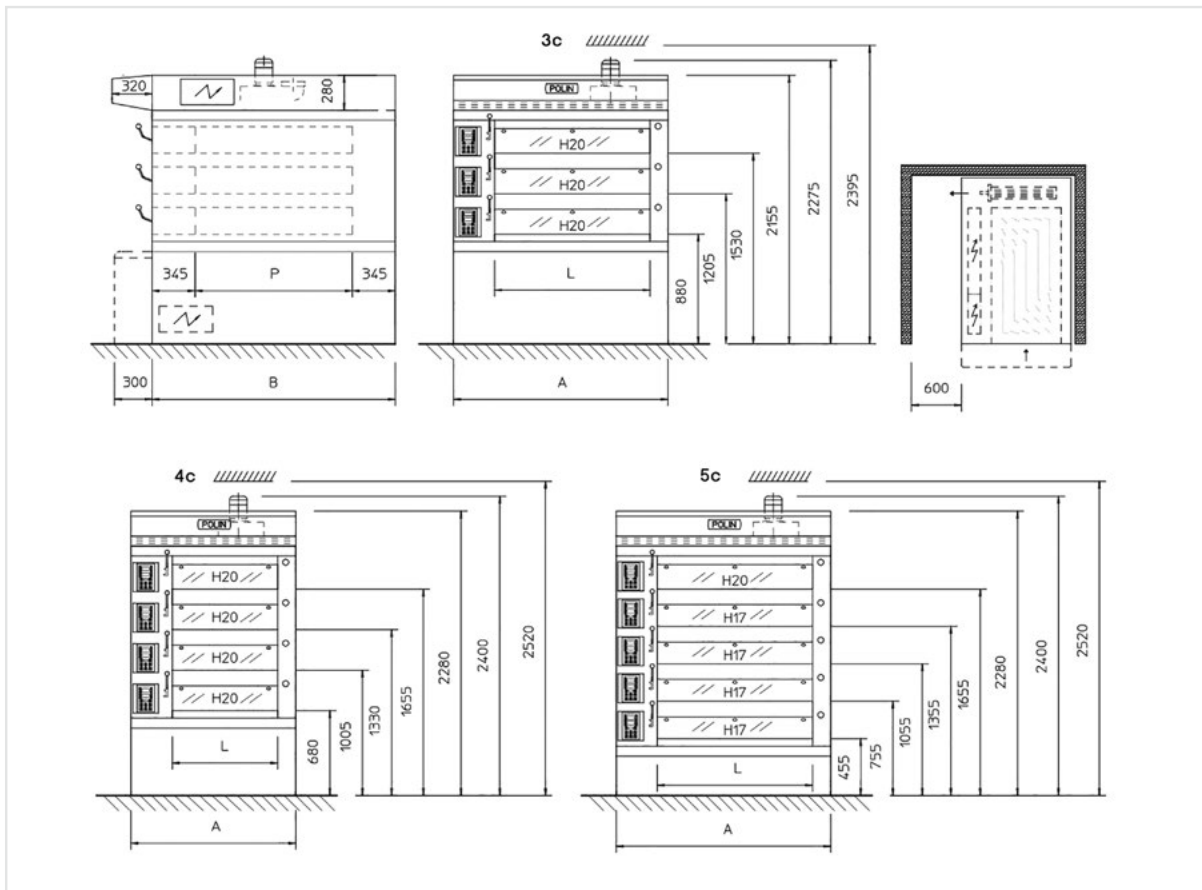

	Chambers	Useful dimension chambers		Overall dimensions		Installed power					
		Width	Depth	Width	Depth	Electric system calculator		With computer-economizer		With computer economizer for bakery manag.	
	n°	L mm	P mm	A mm	B mm	kW	Super Power	kW	Super Power	kW	
CLASSIC	3,2 / 84x126-3	3	840	1260	1320	1950	17,6	28,8	13,2	19,5	9,2
	4,2 / 84x126-4	4	840	1260	1320	1950	23,1	38,1	18,8	28,8	12,0
	5,3 / 84x126-5	5	840	1260	1320	1950	28,7	47,5	24,3	38,1	14,8
	4,3 / 84x170-3	3	840	1700	1320	2390	21,4	35,5	15,7	24,0	11,1
	5,7 / 84x170-4	4	840	1700	1320	2390	28,2	47,0	22,6	35,5	14,5
	7,1 / 84x170-5	5	840	1700	1320	2390	35,0	58,6	29,4	47,0	18,0
	4,7 / 124x126-3	3	1240	1260	1720	1950	22,2	35,7	16,3	24,1	11,6
	6,2 / 124x126-4	4	1240	1260	1720	1950	29,3	47,2	23,4	35,7	15,1
CLASSIC FIT	7,8 / 124x126-5	5	1240	1260	1720	1950	36,4	58,8	30,5	47,2	18,7
	3,1 / 124x84-3	3	1240	840	1600	1460	20,0	36,9	14,8	24,9	10,5
	4,2 / 124x84-4	4	1240	840	1600	1460	26,4	48,9	21,2	36,9	13,6
	5,2 / 124x84-5	5	1240	840	1600	1460	32,7	60,9	27,6	48,9	16,8